

TURBO CALCIUM®

Maintenance Free Battery



TURBO CALCIUM

REF	ARRANQUE A (EN)	CAPACIDAD AH (EN)	DIMENSIONES BAT			FIJACION	ESQUEMA	TIPO BORNE
			L (MM)	A (MM)	H (MM)			
MF50L1D	420	50	207	175	190	B3	0	1
MF65L2D	600	65	242	175	190	B3	0	1
MF75L3D	680	70	277	175	190	B3	0	1
MF100L5BD	800	100	352	175	190	B3	0	1

BATERIAS VEHICULOS JAPONESES

57029	500	70	259	172	221	B0	0	1
57024	500	70	259	172	221	B0	1	1
59519	750	100	305	178	220	B1	0	1
59518	750	100	305	178	220	B1	1	1


BATERIAS ESPECIALES NATO

REF	VOL	CCA (EN)	DIMENSIONES BAT			RESERVA DE CAPACIDAD	CAPACIDAD AH (EN)
			L (MM)	A (MM)	H (MM)		
12FN110	12	800 A	284	266	225	200 MIN	110 AH
12FN125	12	800 A	284	266	225	200 MIN	110 AH


NATO



ESQUEMA 12V

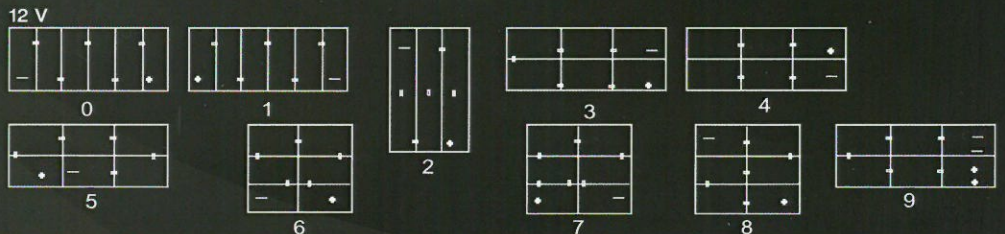

BORNES



FIJACION

